

PUBLICATION NUMBER : 60169688
PUBLICATION DATE : 03-09-85


APPLICATION DATE : 13-02-84
APPLICATION NUMBER : 59024755

APPLICANT : ATSUGI MOTOR PARTS CO LTD;

INVENTOR : SHIOYAMA SHUICHIRO;

INT.CL. : F04C 18/344 // F04C 29/02

TITLE : VANE-TYPE ROTARY COMPRESSOR

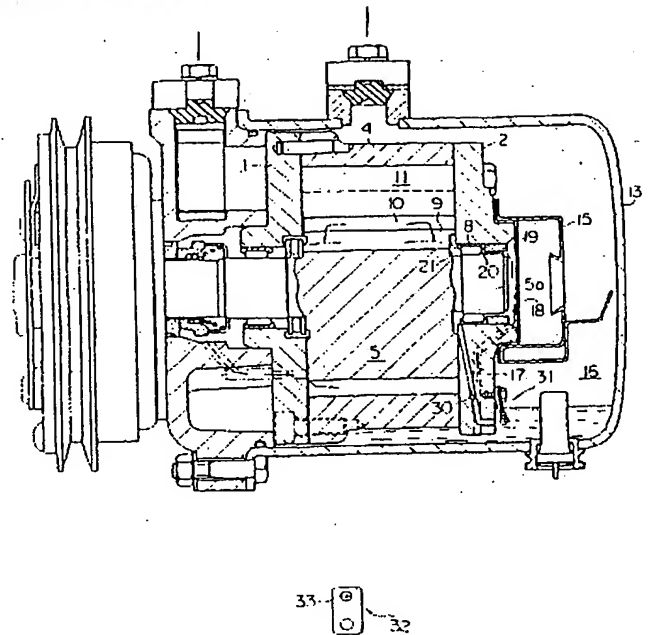

ABSTRACT : **PURPOSE:** To prevent the generation of chattering and the breakage of a vane by installing a control valve which permits the flow of lubricating oil at low temperature into a bypass lubricating-oil passage installed in parallel to a lubricating-oil passage and making the back pressure of the vane on low-temperature starting nearly equal to the discharge pressure in the high-pressure part.

CONSTITUTION: A bimetal valve 32 as control valve 31 is installed into a bypass lubricating-oil passage 30 formed in parallel to the lubricating-oil passages 17-19. Said bimetal valve 32 opens the bypass lubricating-oil passage 30 as shown in the figure, when the temperature of lubricating-oil is low. Therefore, when a compressor is started, the bypass lubricating-oil passage 30 is opened by the bimetal valve 32, and the lubricating-oil in the high-pressure part 16 is directly supplied into a back-pressure passage 9 through the bypass lubricating-oil passage 30. Therefore, the flow rate of the lubricating-oil increases, and the pressure in the back-pressure passage 9 is increased, and even in the case where the viscosity of lubricating-oil is large at low temperature, a vane 11 can be projected sufficiently, and the generation of chattering can be prevented. Therefore, the breakage of the vane 11 and the generation of abnormal noise can be prevented.

COPYRIGHT: (C)1985,JPO&Japio